


SOLUTIONS TO SIMPLIFY YOUR WORKLOAD

Material Handling, Storage & Specialized Equipment



VERSA II-2K# STD SP F89701

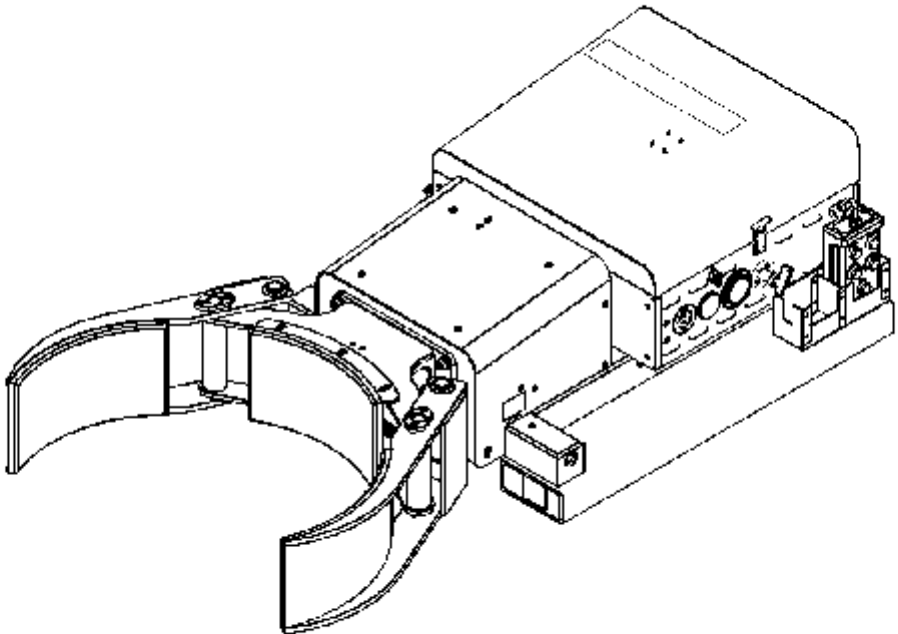

Notice to Purchaser

All statements, technical information, and recommendations related to Valley Craft's products are based on information believed to be reliable, but the accuracy or completeness is not guaranteed. Before using this product, you must determine if it is suitable for your intended application or situation. You assume all risks and liability associated with such use or implementation.

Product Testing

We perform vigorous in-house safety and durability testing to ensure that the performance of our products meets the demands of the workplace. We also expect the same from manufacturers who supply components for our products. We do this to ensure that Valley Craft is a name that our customers trust and associate with quality.

Publication Revision Notice

Following is a history of changes to this publication, including the current revision.

Last Updated: 02/12

Copyright Notice

© Valley Craft, Inc. All rights reserved. No part of this publication may be reproduced, photocopied, stored on a retrieval system, or transmitted without the express written consent of Valley Craft.

Trademarks

The Valley Craft logo is a Valley Craft Trademark. All other company or product names are trademarks or registered trademarks of their respective owners. Use of a term in this document should not be regarded as affecting the validity of any trademark or service mark.

■ Table of Contents

| | |
|---|--------------|
| Safety | 4-6 |
| Safety Overview | 4 |
| Safety Message Conventions | 5 |
| Material Safety Data | 6 |
| Product Description | 7 |
| Specifications..... | 7 |
| Features..... | 7 |
| Unpacking and Assembly | 8 |
| Receiving and Inspection..... | 8 |
| Operation | 9-12 |
| Operating Procedure Wired Pendant..... | 9 |
| Operating Procedure Battery Discharge Gauge | 10 |
| Operating Procedure Pressure Relief Adjustment..... | 11 |
| Operating Procedure Safety | 12 |
| Maintenance and Adjustments | 13 |
| Maintenance and Adjustment Procedures..... | 13 |
| Troubleshooting..... | 14 |
| Trouble Shooting Procedures..... | 14 |
| Replacement | 15 |
| Replacement Procedures..... | 15 |
| Parts List..... | 16-21 |
| Exploded View Jaw Assy | 16 |
| BOM Jaw Assy | 17 |
| Exploded View and BOM Clamp/Rotator Assy | 18 |
| Exploded View Control Box Assy | 19 |
| BOM Control Box Assy..... | 20 |
| Exploded View and BOM UGIII | 21 |
| Equipment Drawings | 22-25 |
| Hydraulic Schematic | 22 |
| Electrical Schematic..... | 23 |
| Wired Pendant Schematic | 24 |
| Lost Load Info | 26 |

Safety

Read and understand all safety information and become familiar with all safety symbols contained in this section before moving, operating or performing maintenance on this equipment.

■ Safety Overview

The following general safety precautions must be observed during all phases of operation, service, and repair of this equipment. Failure to comply with these precautions or with specific safety messages elsewhere in this manual may impair the protection provided by the equipment. Such noncompliance would also violate safety standards of design, manufacture, and intended use of the instrument.

- Observe all safety signs posted in your facility.
- Observe warnings, cautions, handling information, storage requirements and other information on all container labels.
- Wear safety glasses with side shields.
- Wear the proper protective clothing, gloves and other protective equipment before handling any chemicals.
- Group the containers for the move by Hazard Class. Do not move acids with toxics, or oxidizers.
- Use maximum care and good judgment in preventing accidents and injuries and seeking first aid.
- Report unsafe conditions, equipment, practices, and on-job injuries.
- Understand your supervisor's instructions. Ask questions if you do not know how to do the job safely.
- Do not engage in tasks which you believe might be unsafe without consulting your supervisor.
- Clean up the work area and equipment upon job completion.
- Before you start work on any electrical system or circuit, check all power sources to ensure that the system or circuit is de-energized.
- Know the hazardous or potentially hazardous substances you work with or are present in your work area. Review Material Safety Data Sheets (MSDS) on these substances, or contact your supervisor.
- **Please review more detailed safety information on page 12.**

■ Safety Message Conventions

Three types of safety notices may be contained in this manual: **Danger**, **Warning** and **Caution** notices. These notices precede the procedural step or portion of text that presents the safety hazard.



DANGER

- **DANGER** indicates an imminently hazardous situation which, if not avoided, will result in death or serious injury. This signal word is to be limited to the most extreme situations.
-



WARNING

- **WARNING** indicates a potentially hazardous situation which, if not avoided, could result in death or serious injury.
-



CAUTION

- **CAUTION** indicates a potentially hazardous situation which, if not avoided, may result in minor or moderate injury. It may also be used to alert against unsafe practices
-

■ Material Safety Data Sheets (MSDS)

A Material Safety Data Sheet (MSDS) provides information on the safe use, handling and potential hazards of a product. This information assists with the proper response in the event of an emergency.

Valley Craft maintains material safety data sheets (MSDSs) on all our products. You are urged to obtain copies of the relevant MSDSs before using our products to protect yourself and others against any known health or safety hazards described in these MSDSs. Valley Craft strives to make safety a top priority. Do not hesitate to contact us to discuss any safety aspects of our products.

The relevant MSDS codes for Valley Craft products are listed below.

- www.conocophillips.com
Super ATF Transmission Oil, MSDS Code 778846
Super-Sta Grease, MSDS Code 775440
- www.batteriesplus.com
Sealed Lead Acid Battery
SLA for English version
SLA Sp for the Spanish version
- [Paint](#)
Contact Valley Craft Customer Service at 1-800-328-1480 or on the Web at customer@valleycraft.com

■ Additional Safety Information

As with any mechanical device, care must be taken during the installation, operation, and maintenance of the device in order to realize the maximum benefit from its ownership.

Note: All personnel involved in the use and maintenance of this device should be thoroughly familiar with the information contained in this manual. Furthermore, it is recommended that all personnel be given adequate instruction and a sufficient period of training in its actual use to insure safety of personnel and proper care of the equipment. It is suggested that the units be initially operated empty until becoming familiar with operation of this unit.

Product Description

The Versa II is a self-powered lift truck attachment which allows the operator to manipulate drums from most lift trucks without any additional equipment. It offers the ability to clamp and forward dump most sizes and types of drums.

■ Specifications

The Versa II specifications are shown in Table 1.

Table 1. Specifications

| | |
|----------------------|-----------------------|
| Dimensions | 34"Wx66"Lx19"H |
| Weight | 834 lbs |
| Load Capacity | 2000 lbs |

■ Features

The Versa II offers state-of-the-art design with many advanced features.

- 115° forward dumping
- Rugged, light plastic, pendant control
- Key Switch disconnects main power
- System pressure gage
- Battery discharge indicator (BDI)
- On board charging system
- Clamping system that clamps steel, fiber, and plastic drum

■ Receiving and Inspecting

When unpacking the Versa II, inspect the equipment for damage or mishandling. If damage is noted, file a damage claim with the carrier within 24 hours and call Valley Craft at 1-800-328-1480. Do not attempt to use the equipment.

Compare the contents of the shipment with the bill of lading. Report any missing items to the carrier and to Valley Craft immediately.

■ Operating Procedures

Only authorized personnel are permitted to use the Versa II. Every load and every situation is different. Every load must be evaluated and planned. Observe the following procedures when using this equipment.

All personnel should be given adequate instruction and a sufficient period of training in actual use of the attachment to insure safety and proper care. The Versa II is intended for use with sealed containers.

1. Insert forks of lift truck into fork tube of drum grip.
2. Attach safety chain to clevis on rear of frame and wrap chain around forklift carriage and clip the safety hook.
3. Turn attachment on.
4. Secure control box near the forklift drivers seat.
5. Advance lift truck until jaws of drum grip center around the drum.
6. Grip drum in center at all times.
7. Activate clamping pressure by depressing the clamp button. To unclamp press safe button and unclamp button at same time. Two handed control helps prevent accidental operations.
8. To dump drums, depress the appropriate button.
9. If drum grip needs to be removed from forklift, set unit down, remove safety chain from around carriage, replace control box unit, and back away from the drum grip.

INST/DG VERSA II S/P

■ Operating Procedures Wired Pendant

Only authorized personnel are permitted to use the Versa II. Every load and every situation is different. Every load must be evaluated and planned. Observe the following procedures when using this equipment. The following describes how to operate the unit with the cabled pendant.



| | CLAMP BUTTON | ROTATE BUTTON | TILT/LIFT BUTTON | SAFE BUTTON |
|--------------|-----------------|------------------|---------------------|----------------|
| CLAMP OPEN | X | | | X |
| CLAMP CLOSE | X | | | |
| ROTATE RIGHT | | X | | |
| ROTATE LEFT | | X | | |
| | | | | |
| | | | | |
| | | | | |

INST/DG VERSA II S/P

■ Operating Procedures Z20836A7 GAUGE-BATTERY DISCHARGE



Configuring Your Gauge

Access to these operations is sequential in this order. Adjustments of the following functions can be performed in the configuration mode.

1. Time-of-Day Clock

During configuration, the right button is used to increment. The left button is used to

1. Enter a selection
2. Advance to the next configurable item

If no change is desired to a specific gauge function, continue to press the left button until the next desired function is reached. The time-of-day clock is entered by setting the hours digits between 01 and 12, then 'minutes' digits between 00 and 59.

Setting the Time-of-Day Clock

The display will flash the two 'hours' digits. Press the right button to increment by one hour, or hold the button to increment continuously. When the desired number of hours is reached, press the left button once. The display will flash the two 'minutes' digits. Press the right button to increment by one minute or hold the button to increment continuously. When the desired number of minutes is reached, press the left button once.

Configuration Notes

The gauge remains in configuration mode for 30 seconds without input from the user. When configuring each function you must enter in all data for that function for it to be saved. If incomplete data is entered for a function and the programming mode is timed out (after 30 seconds of no input received by the gauge), the gauge will revert back to what was previously stored for that item.

Exiting Configuration Mode

The configuration mode can be exited in three ways?

1. Press and hold the left button for three seconds.
2. Leave buttons untouched for 30 seconds.
3. Press the left button after selecting the last (right) digit of the last function available.

Toggling Display Functions

Press the left button to sequentially toggle between the three numeric gauge functions (time-of-day clock, maintenance hours, total hours).


LCD Icons

1. Hourglass Icon – Turned on (not blinking) to indicate that an hour meter is displayed in the numeric display. Flashes to indicate hour meter accumulation.
2. Battery Icon – Turned on (not blinking) to indicate function. It flashes when a low condition is detected.
3. Colon – Flashes to indicate that the time-of-day clock is being displayed in the numeric display and that time is counting-up.
4. Decimal Point – To indicate 1/10 of a volt for the BDI profile.
5. Percent – Indicates remaining percentage of interval or level.

Troubleshooting

| Problem | Possible Causes |
|-------------------------|---|
| No display | Terminals not connected Improper voltage |
| Stays at full | Instrument voltage does not match battery voltage V+ connected to wrong terminal |
| Will not reset | Instrument voltage does not match battery voltage Battery not fully charged Defective battery |
| Resets without charging | Not connected to battery terminal |
| Empty too soon | V+ connected to wrong terminal Instrument voltage does not match battery voltage Terminals not connected to battery |
| Cannot configure | No power to the setup enable pin |
| | |

Operating Procedures for Pressure Relief Adjustment for Clamp Function

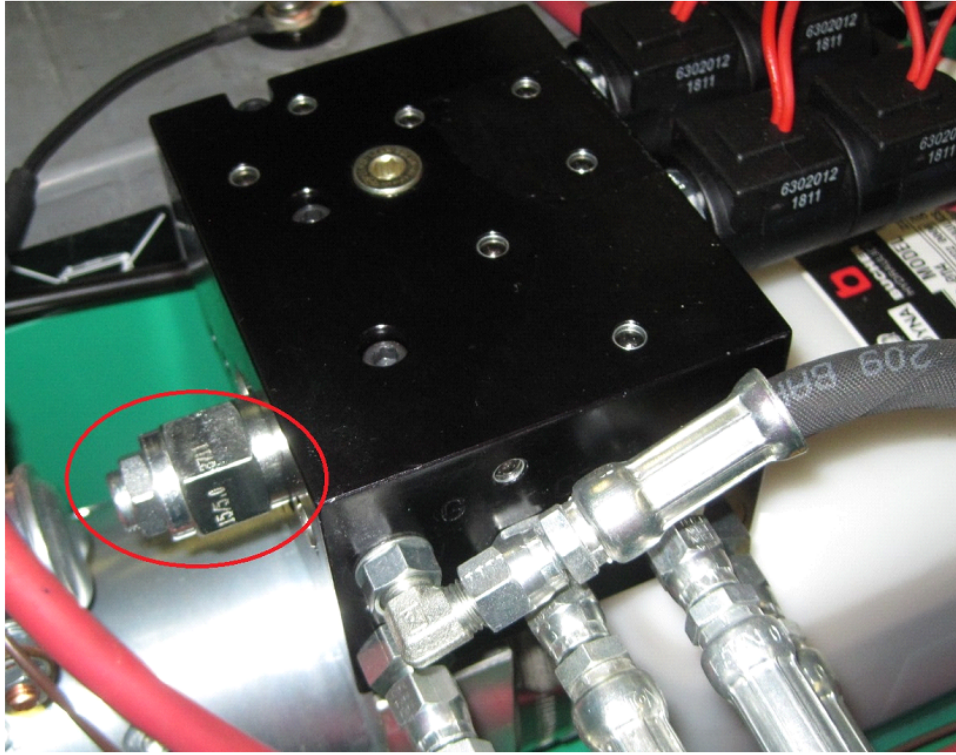

Adjusting Pressure Relief

Access to your pressure relief valve is found in the main control box. Once the valve has been located adjustments can be made by loosening the jam nut. Adjusting the valve CW (clock wise) increase pressure while adjusting the valve CCW (counter clock wise) decrease the pressure.

Each load requires different pressure setting dependant on the items listed below

1. Barrel Material (steel, plastic, fiber)
2. Weight of barrel
3. Rigidity of barrel (open or closed)

Valley Craft has done testing on different loads and offer some guidelines below. *(Relief valve comes preset to approximately 1400 PSI)*

| Barrel Material | Weight of barrel | Rigidity of barrel | Pressure Setting PSI |
|-----------------|------------------|--------------------|----------------------|
| Steel | 2000 | Closed | 1400 |
| Plastic | 800 | Closed | 1000 |
| Fiber | 500 | Closed | 1000 |

The Ultra Grip III comes standard with the clamp pressure set at 1200 psi, each end user should verify this is the correct setting for their load.

Troubleshooting

| Problem | Possible Causes |
|---------------|--|
| Drum Slipping | Pressure set too low Drum not against back jaw saddle when clamping |
| Drum Crushing | Pressure set too high |
| | |
| | |

Safety

Read and understand all safety information and become familiar with all safety symbols contained in this section before moving, operating or performing maintenance on this equipment.



CAUTION

- It is recommended that all operators practice operation of the Versa II and its controls with an empty drum before using it on full drums to familiarize themselves with the machine and to develop safe working habits.
- Too much pressure applied to the drum will cause crushing.
- Never activate the clamping function while the forklift is in motion.
- When dumping drums, dump slowly, watching for drum distortion as contents are dumped. The dumping capacity is limited by the strength of the container being dumped (an open top drum must be capable of retaining its original cylindrical shape). A distorted drum may fall out of the grip.
- Maximum lifting capacity is 2000 lbs. Actual capacity may be limited by the size of the lift truck. Always follow lift truck manufacturer's specifications.

Maintenance and Adjustments

■ Maintenance and Adjustment Procedures

To keep the Versa II operating properly, timely maintenance and adjustments are required. These procedures should be performed only by qualified personnel who are familiar with the equipment.

Important:

- **Always disconnect and remove the batteries from the attachment before beginning an inspection or repair.**

Before each use:

1. Be sure the batteries are fully charged and free from damage.
2. Inspect safety chain and verify it is in good condition. Replace if necessary.
3. Inspect attachment for sharp edges or burrs.
4. Inspect hydraulic hoses for any leaks or punctures.

Every 6 months:

1. Inspect and grease pivot points.
2. Check hydraulic fluid. Correct fluid level is 1 to 2 inches from top of fluid fill/breather cap. Do not overfill. Use automatic transmission fluid only.
3. Inspect wiring harness for pinched wires or loose connections.
4. Inspect all fasteners and tighten if necessary.
5. Inspect battery charger and connections. Tighten if necessary.

Troubleshooting

■ Troubleshooting Procedures

The Versa II is a quality product that is designed and manufactured to provide prolonged service under normal operating conditions. If troubleshooting is required, it should be performed only by qualified personnel who are familiar with the equipment.

| Problem | Possible Cause | Solution |
|--------------------------------|-------------------------|--|
| Batteries will not charge | Faulty batteries | Load test batteries to ensure they are good. If bad replace. |
| | Faulty Charger | Verify if charger is outputting amperage. If bad replace. |
| Unit not functioning | Low/Dead batteries | Recharge batteries |
| | Improper grounding | Check motor & battery wire connections. |
| | Damaged or loose wiring | Check wiring to switches in control box. |
| Only certain functions operate | Damaged or loose wiring | Check wiring to switches in control box |
| | Bad switches | Replace |
| | Bad solenoids | Replace |
| Unit is crushing drums | Too much pressure | Grip drum just to the point that the drum starts to distort |
| Cylinder leaking | Worn/old o-rings | Replace seals in cylinder |

Replacement

■ Replacement Procedures

Occasionally, it will be necessary to replace a part that has been Damaged or worn. Many parts on this Versa II are replaceable. If replacement of a part is required, it should be performed only by qualified personnel who are familiar with the equipment.


See page 16 for available replacement parts. Identify the part number you need. Contact Valley Craft Customer Service at 1-800-328-1480 or on the Web at customer@valleycraft.com.

Information required when contacting Valley Craft:

- A. Company name and address
- B. Contact persons name
- C. Telephone number
- D. E-Mail address
- E. Model Number
- F. Date of manufacture
- G. Part number(s) of part(s) to be ordered

The model number and date of manufacture is stamped on a metal tag located on the control box.


F60559A0 UG-JAW ASSY 18-28 MAXI
EXPLODED VIEW

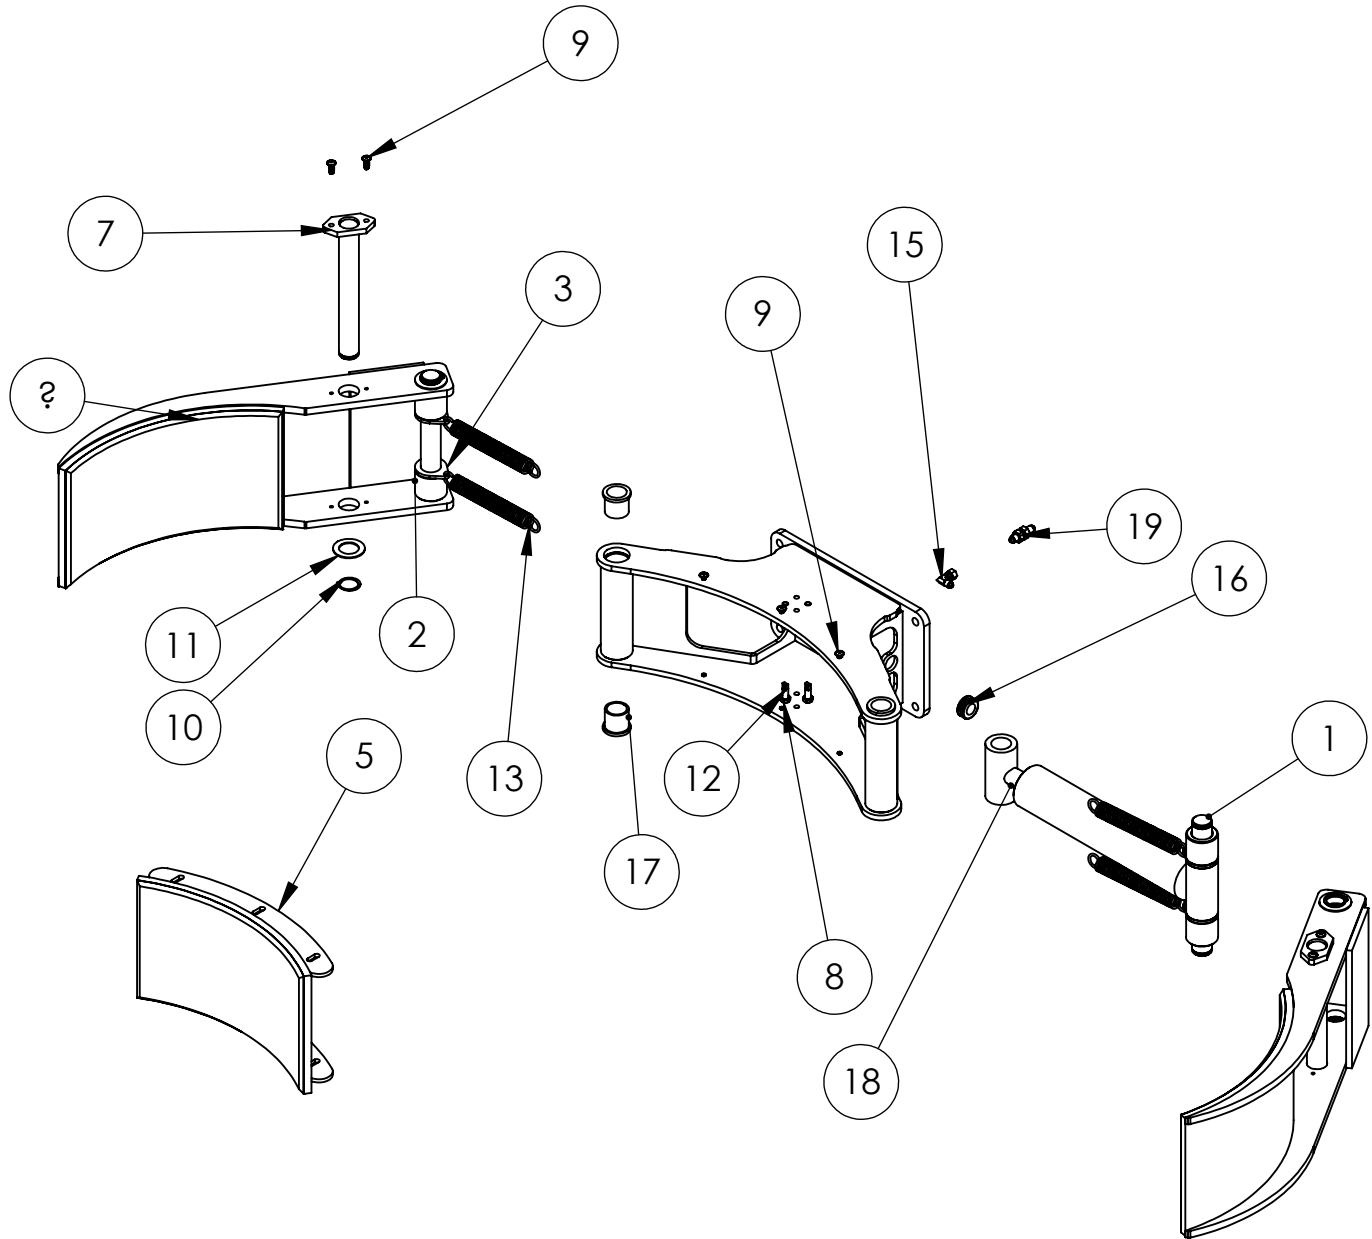

F60559A0 UG-JAW ASSY 18-28 MAXI
Bill of Materials


| ITEM NO. | PART NUMBER | DESCRIPTION | EXP VIEW/QTY. |
|----------|-------------|--------------------------------|---------------|
| 1 | F50401 | CYL PIN 1.25 UG3 FRT SECT | 2 |
| 2 | F50435 | RD-2.00/UG3 JAW ASSY CYL SPCR | 4 |
| 3 | F50438 | SHT-.19/UG3 JAW ASSY SPRG CLIP | 4 |
| 4 | F60560A1 | ARM WLDMT MAXI II | 1 |
| 5 | F68824A2 | UG-JAW-SADDLE WLDMT-15-30 | 1 |
| 6 | F68825A3 | UG-JAW-WLDMT-18-28 | 2 |
| 7 | F68832A0 | UG-JAW-PIN WLDMT-20-35 | 2 |
| 8 | Z10026A8 | NUT-HEX JAM 3/8-16ZP | 4 |
| 9 | Z10438A0 | S-BHCS 1/4-20X3/4 BLK | 10 |
| 10 | Z10534A4 | RING-RTNG 1-1/4 | 6 |
| 11 | Z10592A2 | BUSH-MACH 1-1/4x10GA | 6 |
| 12 | Z11484A3 | CONNECTOR 3/8-16 SPRING | 4 |
| 13 | Z11485A2 | SPRING-EXTENSION 1.00X.14X8.00 | 4 |
| 14 | Z20616A6 | FTG 90 6801-4-4 NWO | 2 |
| 15 | Z20704A0 | FTG 90 6500-4-4 SWL | 2 |
| 16 | Z20813A0 | GROMMET-.75IDX1.06HOLEX.25TH | 2 |
| 17 | Z20830A3 | BRG-BRZ-FLG 1.25X1.50X1.50 | 4 |
| 18 | Z20845A8 | CYL ASSY-UG3 CLAMP 1.13ROD | 1 |
| 19 | Z84897A3 | FTG STR 2700-4-4-LN | 2 |

F60579A0 VERSA-CLAMP/TILT ASSY
Exploded View and Bill of Materials

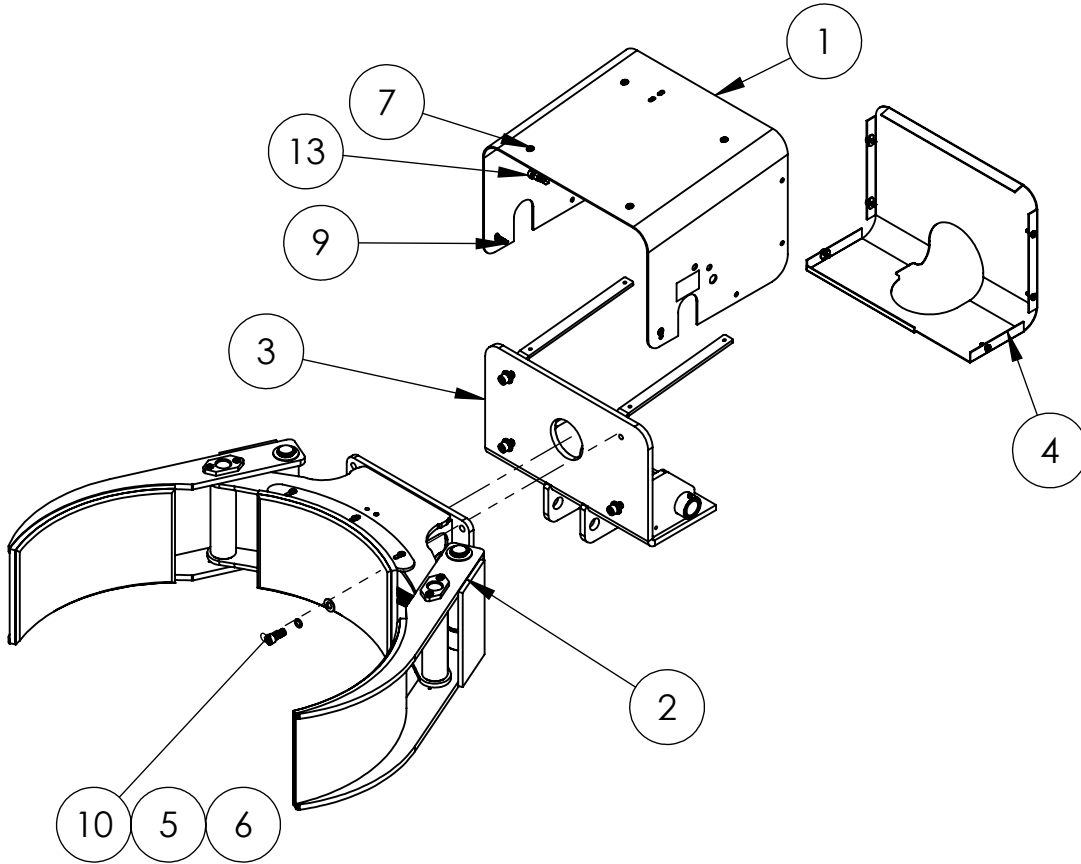

| BOM Table | | | |
|-----------|-------------|------------------------------|--------------|
| ITEM NO. | PART NUMBER | DESCRIPTION | Default/QTY. |
| 1 | F50377 | UG-RTB-SIDE HOOD | 1 |
| 2 | F60559A0 | UG-JAW ASSY 18-28 MAXI | 1 |
| 3 | F60571A2 | VERSA II-TILT-ASSY | 1 |
| 4 | F68830A8 | UG-RTB-REAR SHEILD WLDMT | 1 |
| 5 | Z10216A8 | WASHER-1/2 LOCK MD | 4 |
| 6 | Z10331A8 | WASHER-1/2 FLAT SAE | 4 |
| 7 | Z10438A0 | S-BHCS 1/4-20X3/4 BLK | 10 |
| 8 | Z10627A7 | ZERK-GREASE .188 DRIVE | 2 |
| 9 | Z11550A9 | S-BHCS 1/4-20X1-1/4 BLACK | 2 |
| 10 | Z11555A0 | S-SHC 1/2-13X1-1/4 | 4 |
| 11 | Z20704A0 | FTG 90 6500-4-4 SWL | 4 |
| 12 | Z41645A5 | DECAL-DANGER KEEP HANDS AWAY | 2 |
| 13 | Z84897A3 | FTG STR 2700-4-4-LN | 2 |

**F60580A1 VERSA-CNRLBOX-ASSY
EXPLODED VIEW**

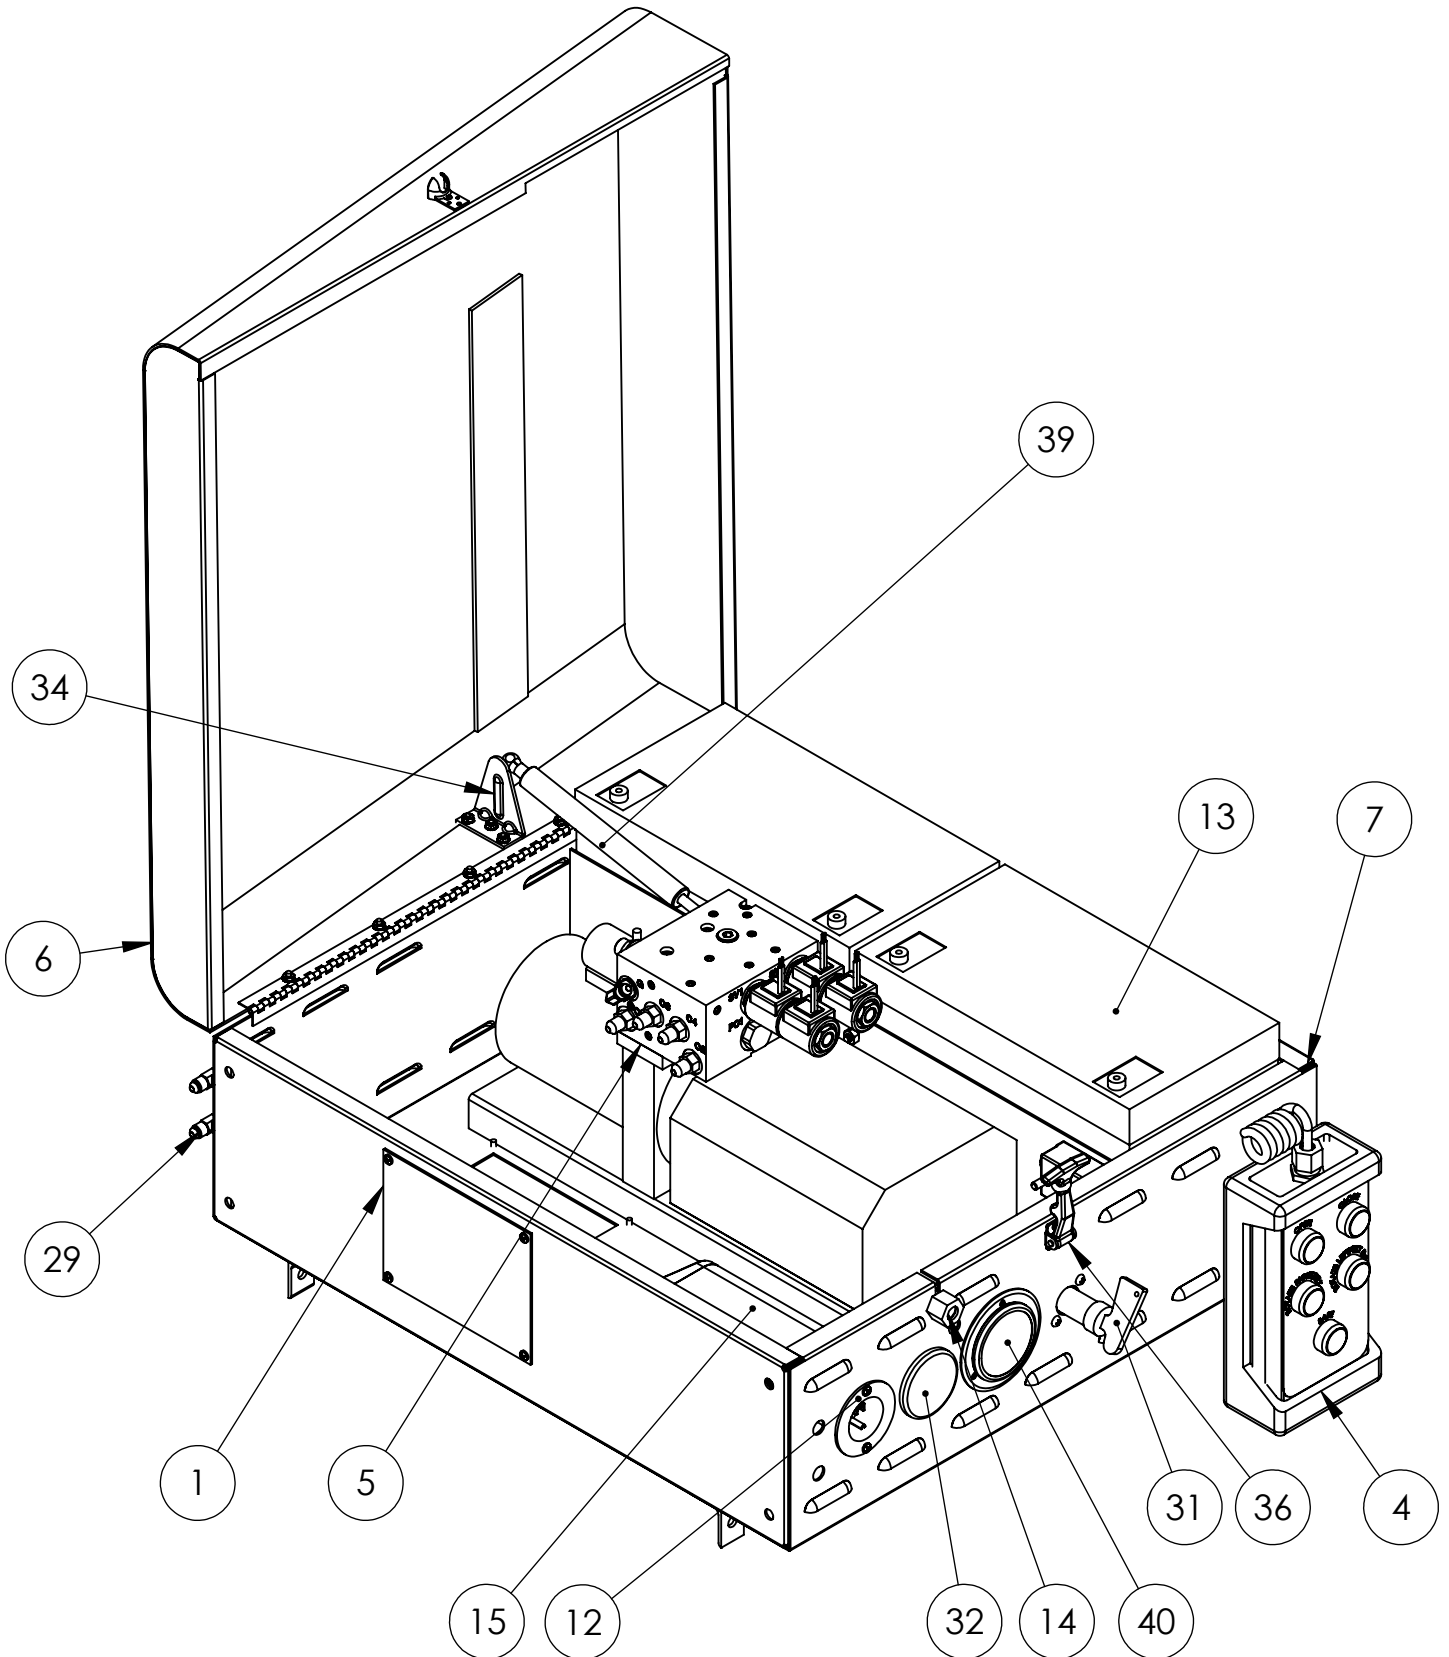


INST/DG VERSA II S/P

F60580A1 VERSA-CNRLBOX-ASSY
Bill of Materials

| ITEM NO. | PART NUMBER | DESCRIPTION | Default/ QTY. |
|----------|-------------|--------------------------------|------------------|
| 1 | F50432 | UG-CNRLBOX-ACCESS PANEL | 2 |
| 2 | F50804 | FELT PAD UG3 BTM BAT 7.25X25" | 1 |
| 3 | F50805 | FELT PAD UG3 TOP BAT 2.50X16" | 1 |
| 4 | F60573A4 | PENDANT ASSY/FORK ATTACH | 1 |
| 5 | F60575A6 | PP-2FUNC 12V | 1 |
| 6 | F68839A7 | UG-CTL-LID WLDMT | 1 |
| 7 | F68840A8 | UG-CNRLBOX- BASE WLDMT | 1 |
| 8 | Z00008A1 | CIRCUIT BRKR SLA-150 | 1 |
| 9 | Z00111A5 | CABLE-BAT BLK 6LG | 1 |
| 10 | Z00113A3 | CABLE-BAT RED 15.5LG | 1 |
| 11 | Z00114A2 | CABLE-BAT BLK 15.5LG | 3 |
| 12 | Z00120A4 | PLUG-FLGD INLET 125V | 1 |
| 13 | Z00171A6 | BATTERY-12V 100AH SEALED LEAD | 2 |
| 14 | Z00407A5 | CORD GRIP FOR 18/3 | 1 |
| 15 | Z00546A4 | CHRGR-BATTERY 12/24 120VAC | 1 |
| 16 | Z00547A3 | CABLE-BAT 12V-27" RED 7/16X1/4 | 1 |
| 17 | Z00548A2 | CABLE-BAT 12V-6" RED 7/16X1/4 | 1 |
| 18 | Z10003A5 | NUT-HEX KEPS #4-40 | 3 |
| 19 | Z10035A7 | NUT-HEX KEPS 1/4-20 | 3 |
| 20 | Z10176A6 | S-RHM #10-24X1/2 | 6 |
| 21 | Z10323A8 | S-PTHM 1/4-20X1/2 | 1 |
| 22 | Z10335A4 | S-CRG 1/4-20x3/4 ZP | 2 |
| 23 | Z10382A6 | NUT-HEX KEPS #8-32 | 11 |
| 24 | Z10385A3 | S-PTHM #8x3/8 LG | 10 |
| 25 | Z10391A5 | NUT-HEX KEPS #10-24 | 6 |
| 26 | Z10463A8 | S-PTHM #8-32x3/8 | 11 |
| 27 | Z10595A9 | RIVET-POP 1/8x1/8 ST | 3 |
| 28 | Z11548A1 | S-FHM #4-40X3/8 ZP | 3 |
| 29 | Z20704A0 | FIG 90 6500-4-4 SWL | 3 |
| 30 | Z20814A9 | GROMMET-.75IDX1.13HOLEX.09TH | 2 |
| 31 | Z20818A5 | SWITCH-BATTERY DISCONN/PD | 1 |
| 32 | Z20836A7 | GAUGE-BATTERY DISCHARGE | 1 |
| 33 | Z20849A3 | FIG 90 2502-4-4 | 1 |
| 34 | Z84866A4 | 10MM BALL MOUNT PLATE TALL | 1 |
| 35 | Z84867A3 | GAS SPRING END 10MM STEEL | 2 |
| 36 | Z84869A1 | LATCH-DRAW RUBBER | 1 |
| 37 | Z84897A3 | FIG STR 2700-4-4-LN | 2 |
| 38 | Z84905A5 | GAS SPRING MOUNT STR | 1 |
| 39 | Z84906A4 | GAS SPRING 60 LB 4" STROKE | 1 |
| 40 | Z84909A1 | GAUGE-PRESSURE 0-3K PSIG | 1 |


**F89701 VERSA II-2K# STD SP
ISO View and Bill of Materials**

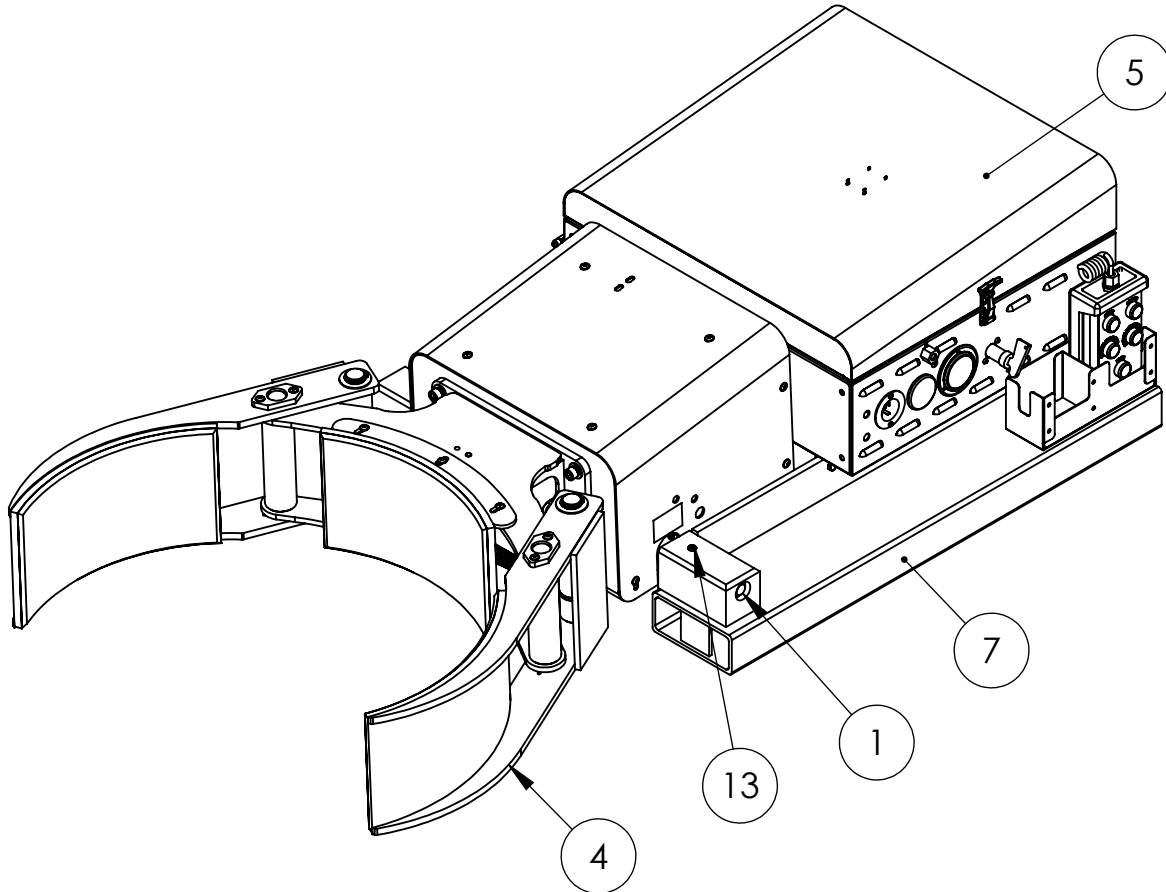

| ITEM NO. | PART NUMBER | DESCRIPTION | QTY. |
|----------|-------------|-------------------------------|------|
| 1 | F50383 | UG-RTB-AXLE | 1 |
| 2 | F50447 | PIN-CLEVIS/TILT CASE | 1 |
| 3 | F52687A6 | PIN-CLEVIS/TILT CASE (KANBAN) | 1 |
| 4 | F60579A0 | VERSA-CLAMP/TILT ASSY | 1 |
| 5 | F60580A1 | VERSA-CNRLBOX-ASSY | 1 |
| 6 | F68823A1 | UG-PENDANT BOX WLDMT | 1 |
| 7 | F68838A6 | UG-FRAME-WELDMNT | 1 |
| 8 | Z10013A3 | BUSH-MACH 1x10GAx1-1/2 OD | 6 |
| 9 | Z10045A5 | NUT-NYL NE 5/16-18 | 4 |
| 10 | Z10124A9 | S-HHC 5/16-18X1-1/4 | 4 |
| 11 | Z10223A9 | RING-RTNG 1 | 4 |
| 12 | Z10299A8 | WASHER-3/16 FLAT SAE | 8 |
| 13 | Z10392A4 | S-SHS 1/2-20X1/2 | 2 |
| 14 | Z10463A8 | S-PTHM #8-32x3/8 | 4 |
| 15 | Z20616A6 | FTG 90 6801-4-4 NWO | 2 |
| 16 | Z84912A8 | CYL 3.5 X 1-1/4 X 8.25 | 1 |


VERSA II-2K# SP, CLAMP & TILT

HYDRAULIC SCHEMATIC

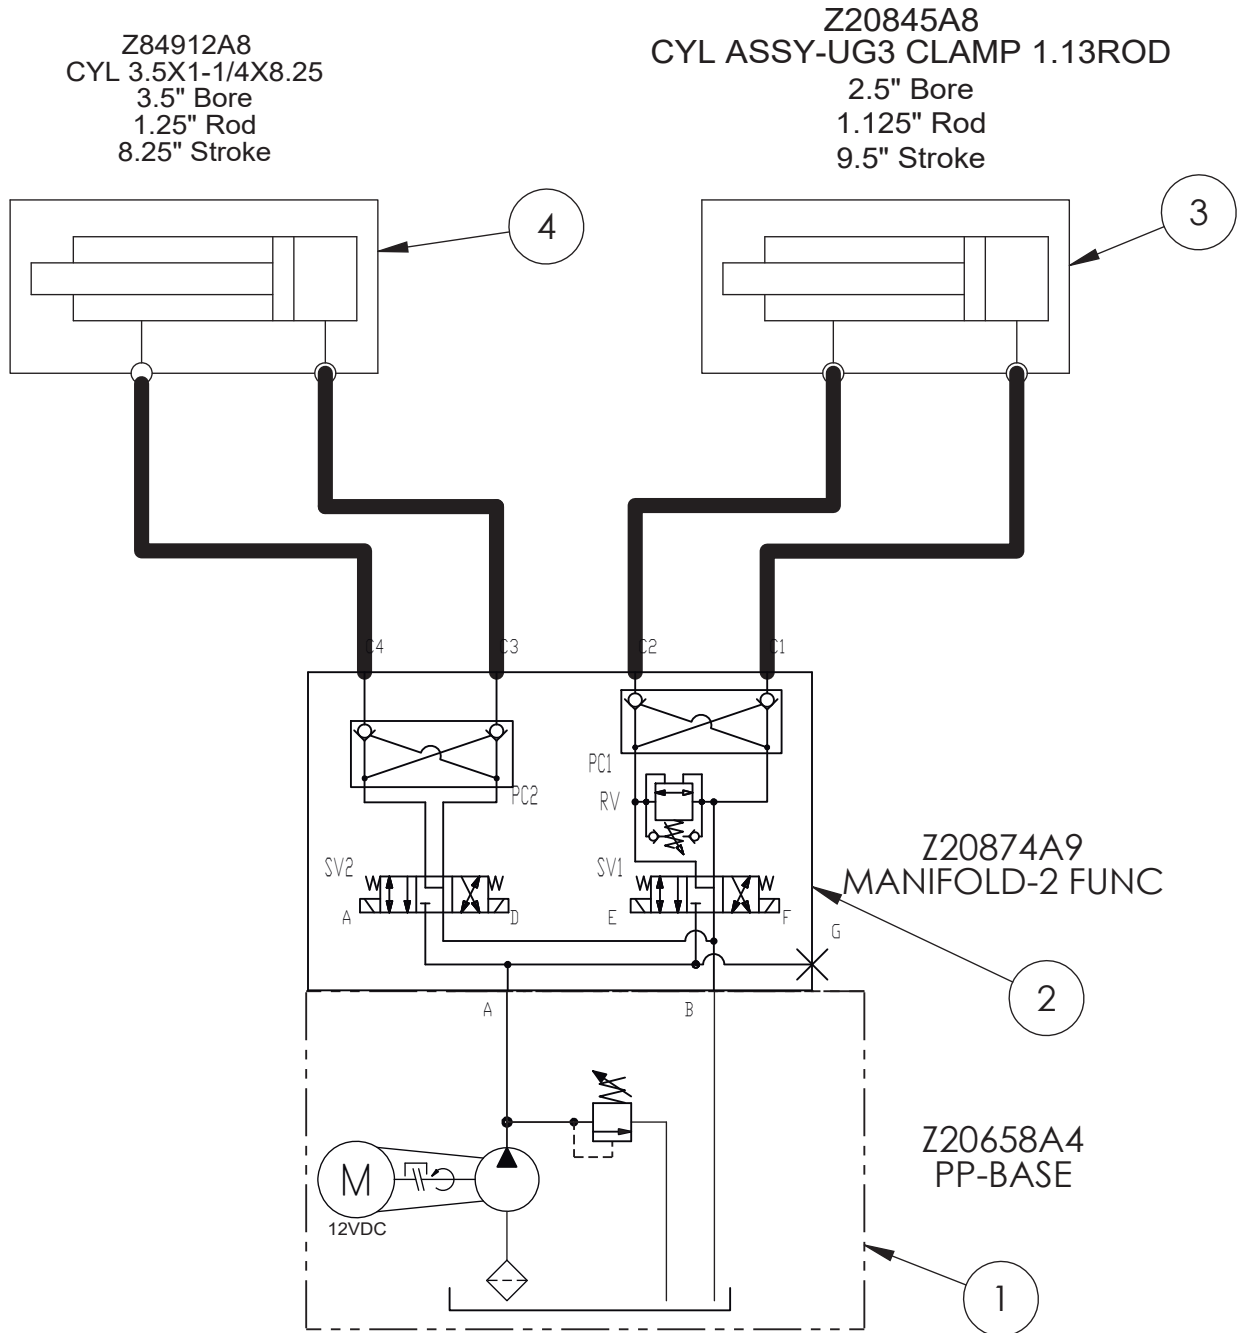


| General Table | | | |
|---------------|----------|------------------------------|-----|
| ITEM | PART NO. | DESCRIPTION | QTY |
| 1 | Z20658A4 | PP-BASE | 1 |
| 2 | Z20874A9 | MANIFOLD-2 FUNC PRES REL | 1 |
| 3 | Z20845A8 | CYL ASSY-UG3 CLAMP 1.13 ROD | 1 |
| 3A | 783-104 | KIT-SEAL 2.5" SCREW IN GLAND | 1 |
| 3B | 783-119 | KIT-SEAL 2.5" PISTON | 1 |
| 4 | Z84912A8 | CYL 3.5X1-1/4X8.25 | 1 |
| 4A | R8491201 | KIT-SEAL 3.5" TILT | 1 |

ELECTRICAL SCHEMATIC

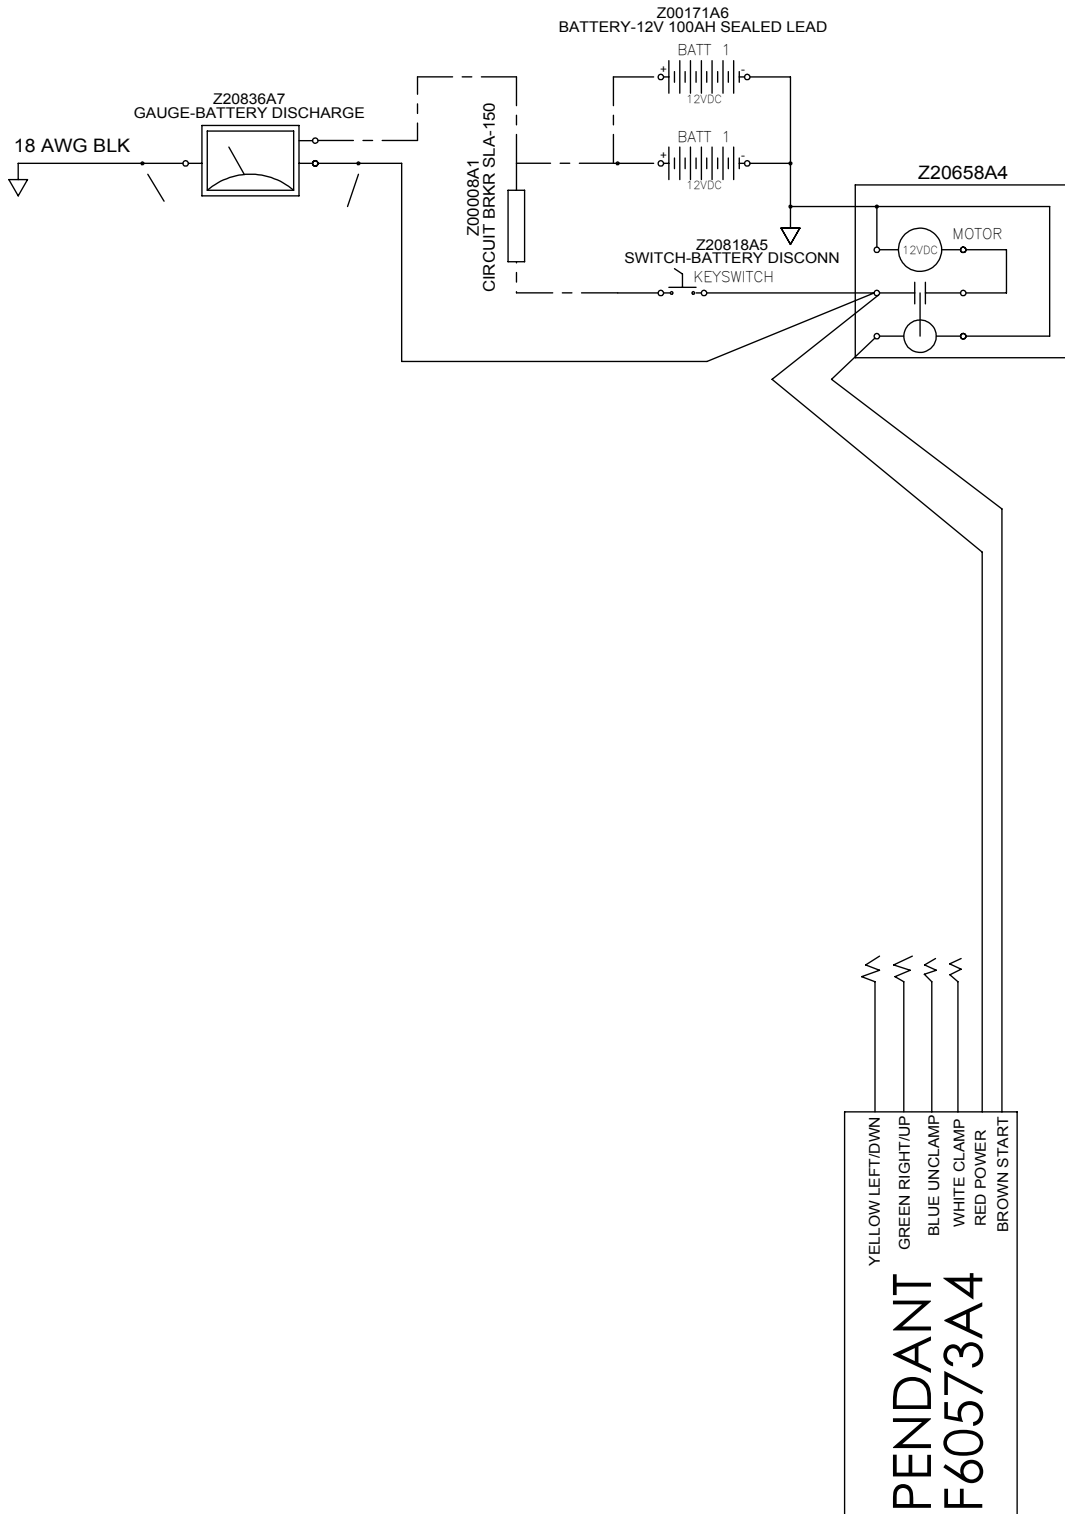

**WIRED PENDANT
F60573A4 PENDANT ASSY/FORK ATTACH**

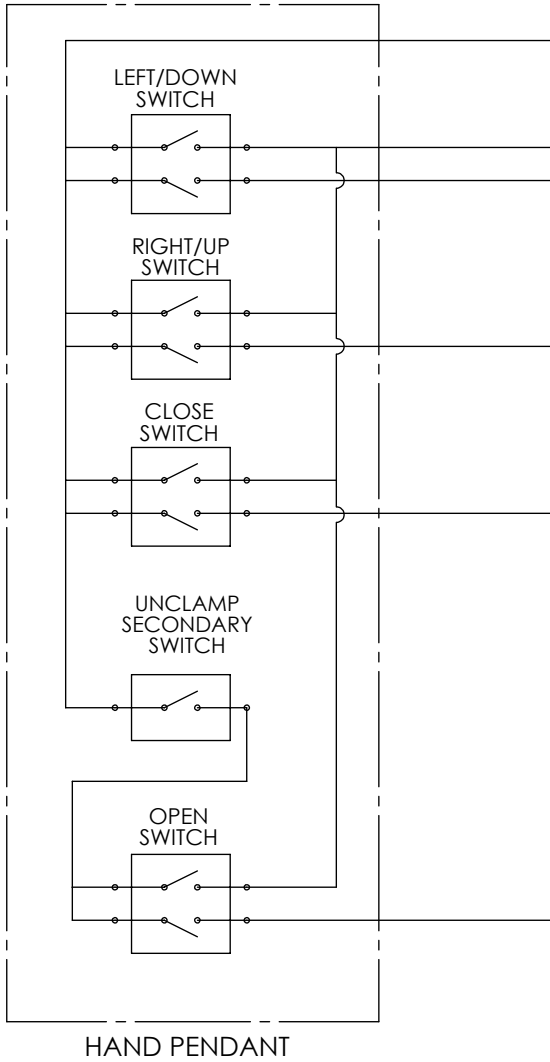


+12 VOLT POWER SOURCE (RED 6)

DC MOTOR START SOLENOID (BRN 5)
LEFT/DOWN SOLENOID (YEL 1)

RIGHT/UP SOLENOID (GRN 2)



CLOSE SOLENOID (WHITE 3)

OPEN SOLENOID (BLU 4)

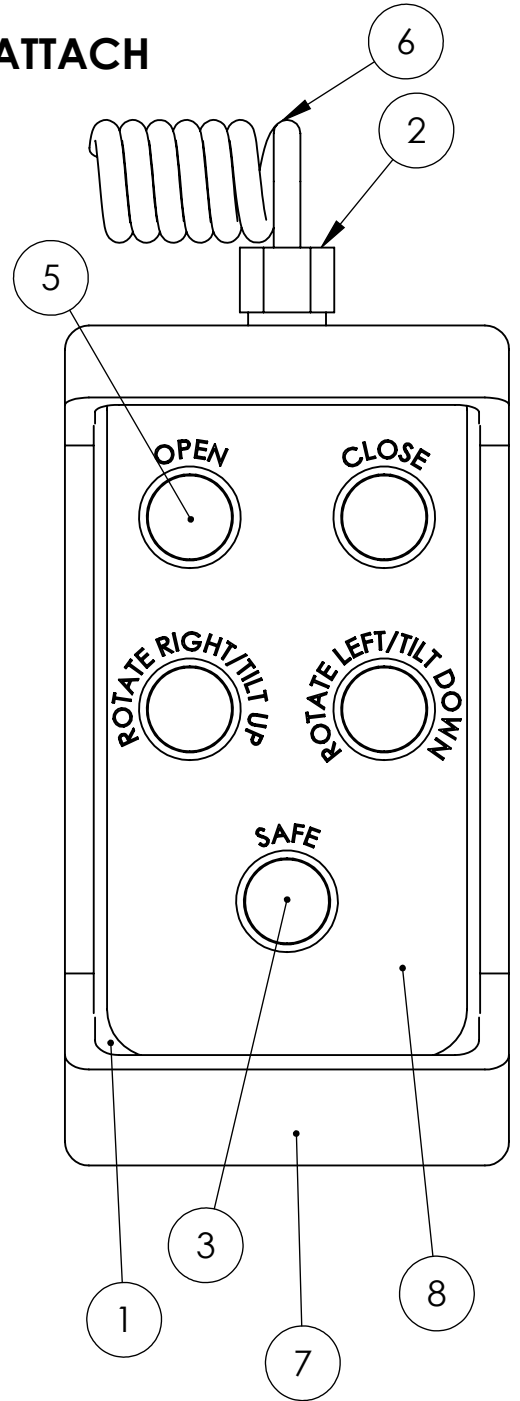

| ITEM NO. | PART NUMBER | DESCRIPTION | QTY. |
|----------|-------------|---------------------------|------|
| 1 | F51476 | ENC-BOX PLST BLK DRLD | 1 |
| 2 | Z00407A5 | CORD GRIP FOR 18/3 | 1 |
| 3 | Z00522A8 | PB-22MM MOM RED | 1 |
| 4 | Z00524A6 | CONTACT BLOCK N/O | 9 |
| 5 | Z00555A5 | PB-22MM MOM BLK | 4 |
| 6 | Z00556A4 | CORD-COIL 6 18G 4-20 | 1 |
| 7 | Z00557A3 | ENC-BOOT RUBBER BLK | 1 |
| 8 | Z41281A8 | DECAL-PENDANT FORK ATTACH | 1 |
| 9 | Z00462A0 | NUT-LOCK ELEC 1/2-14 | 1 |

INST/DG VERSA II S/P

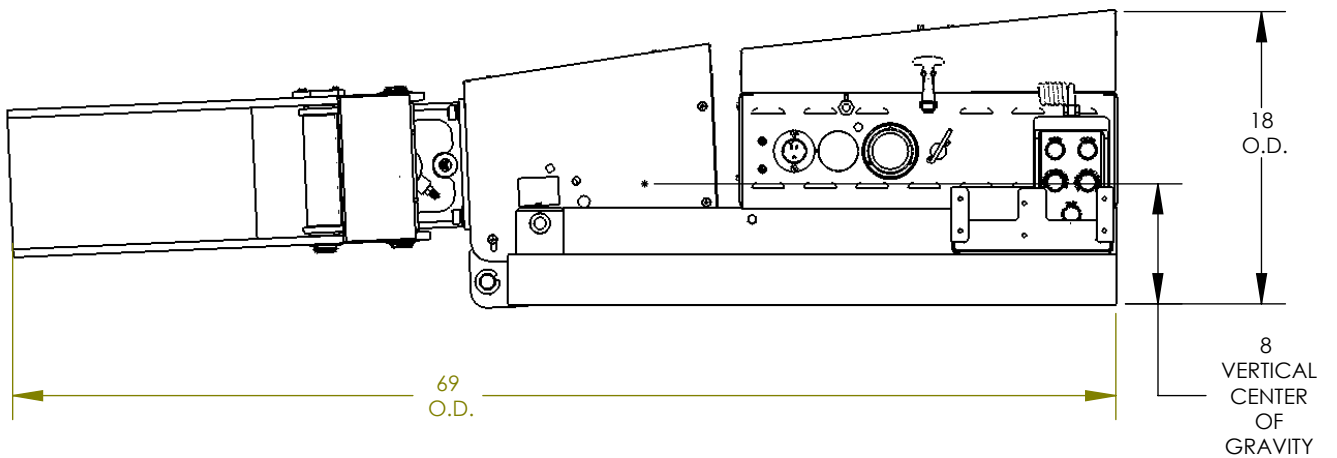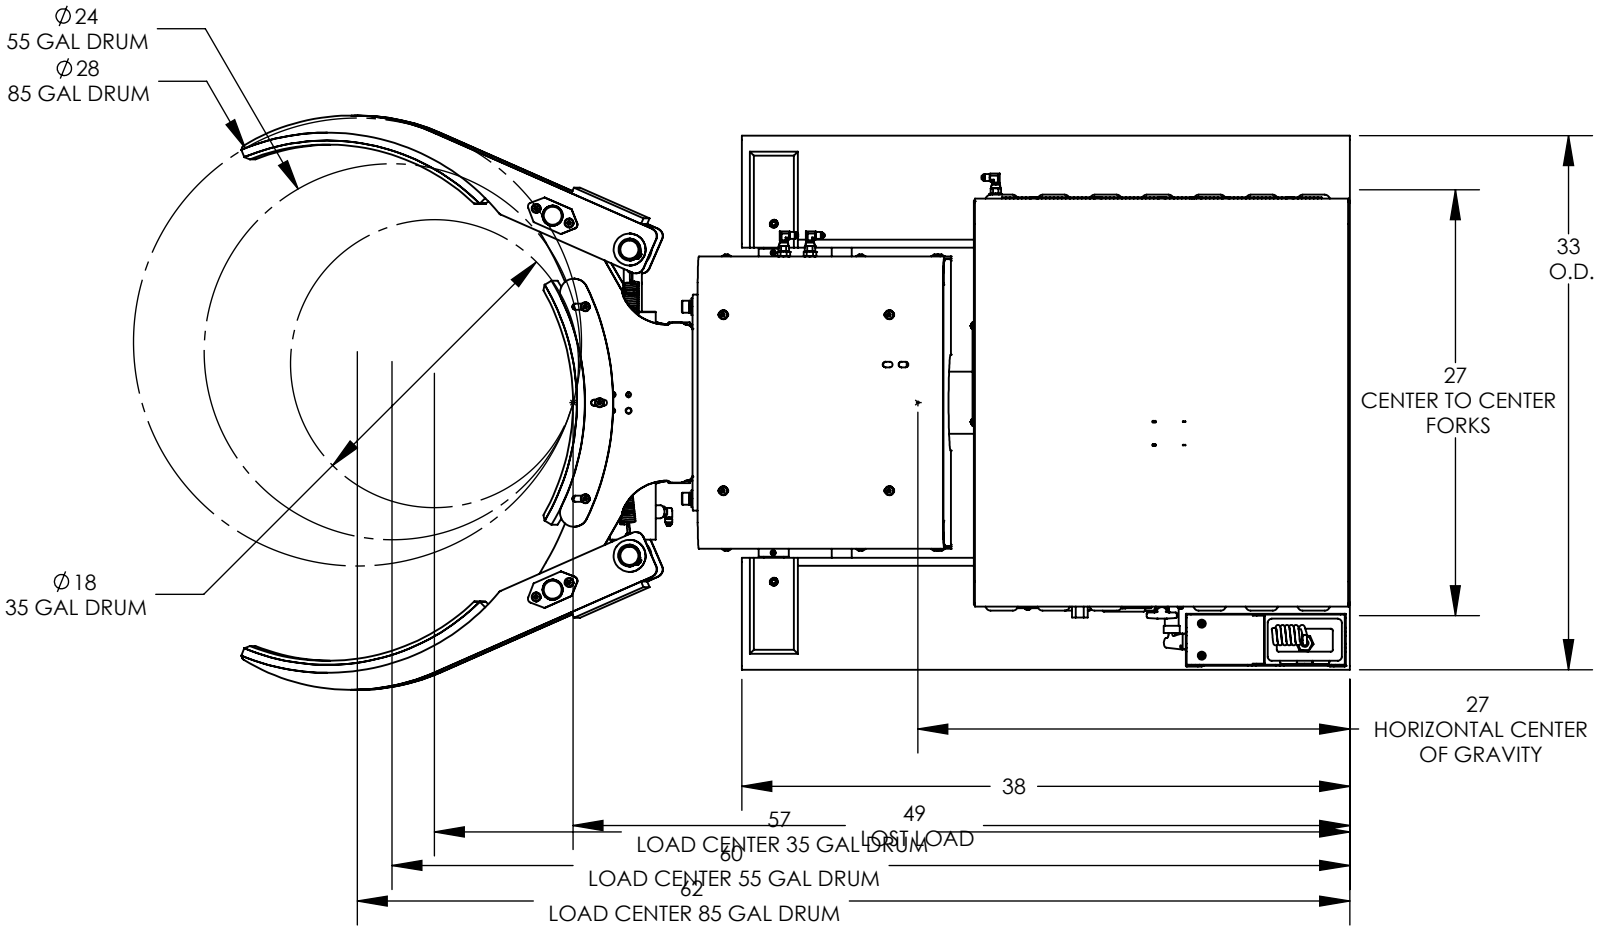

NOTES:

$\triangle A$: LOAD CAPACITY 2000LBS

$\triangle B$: WEIGHT 835

$\triangle C$: CONTACT LIFT TRUCK MANUFACTURER FOR DOWNRATED CAPACITY

Warranty and Limitation of Liability

Valley Craft products are warranted for a period of one (1) year from date of shipment from Valley Craft's plant to be free from defects in material and workmanship under correct use, normal operation and proper application. However, parts of other than Valley Craft manufacture are subject ONLY to the original manufacturer's warranty. Valley Craft's obligation under warranty shall be limited to repair or exchange, at Valley Craft's option, FOB origin factory, of any Valley Craft product or part which proves to be defective as provided herein. Valley Craft reserves the right to either inspect the product at Buyer's location, or require it to be returned to the factory for inspection. The warranty contained herein does not extend to goods damaged, or subject to accident, abuse or misuse after shipment from Valley Craft's factory, nor to goods altered or repaired by anyone other than an authorized Valley Craft representative.

Buyer or user shall not alter, modify or use a Valley Craft product for anything other than its intended function. Valley Craft shall not in any way be responsible for the consequences of any such alteration, modification or misuse.

VALLEY CRAFT MAKES NO EXPRESS WARRANTIES OTHER THAN THOSE WHICH ARE SPECIFICALLY DESCRIBED HEREIN. Any description of the goods sold hereunder, including any references to Buyer's specifications and any descriptions in catalogs, circulars and other written material published by Valley Craft, is for the sole purpose of identifying such goods and shall not create an express warranty that the goods shall conform to such descriptions.

THIS WARRANTY IS EXPRESSLY IN LIEU OF ALL OTHER WARRANTIES, EXPRESS OR IMPLIED. THERE ARE NO IMPLIED WARRANTIES OF MERCHANTABILITY OR FITNESS FOR A PARTICULAR PURPOSE. THIS WARRANTY STATES VALLEY CRAFT'S ENTIRE AND EXCLUSIVE LIABILITY AND BUYER'S EXCLUSIVE REMEDY FOR ANY CLAIM OR DAMAGES IN CONNECTION WITH VALLEY CRAFT PRODUCTS, THEIR DESIGN. SUITABILITY FOR USE, INSTALLATION OR OPERATION OR FOR ANY CLAIMED DEFECTS. VALLEY CRAFT WILL IN NO EVENT BE LIABLE FOR INCIDENTAL OR CONSEQUENTIAL DAMAGES WHATSOEVER, NOR FOR ANY SUM IN EXCESS OF THE PRICE RECEIVED FOR THE GOODS FOR WHICH LIABILITY IS CLAIMED.

Technical Assistance/Warranty Procedure

What's Covered:

- Parts and Labor to correct manufacturer's defect within one year of purchase.
- Freight Cost

What's Not:

- Normal wear items (seal kits, bearings, tires, etc.)

What Voids the Warranty:

- Dirt/Grime that directly causes malfunction of product
- Abuse (i.e. Overloading, damaged, not properly maintained, etc.)
- Product altered by customer

*See "Items not Under Warranty" below for items that have the warranty voided.

Items Under Warranty (less than one year old):

- Warranty replacement parts are provided only when the problem can be identified with near certainty. If not, the customer will return item to Valley Craft, freight collect, for troubleshooting and/or repair. When repaired, product will be returned to customer,



Valley Craft is a modern metals fabricating manufacturer specializing in material handling, storage and specialized solutions designed with safety and usability in mind, and the simplification of even the heaviest of workloads. Since developing the first hand truck with a brake in 1952, Valley Craft has been a true pioneer in safety-conscious material handling and solution-driven products. Our commitment to continuous improvement in a Lean Manufacturing environment results in safe, functional, quality equipment at affordable prices.

Valley Craft, Inc.

2001 South Highway 61
Lake City, Minnesota 55041 U.S.A.

Phone: (651) 345-3386

Toll Free: (800) 328-1480

Fax: (651) 345-3606

E-Mail: customer@valleycraft.com

Web: valleycraft.com • ovation-solutions.com
